


Machine area make room for 1 m!

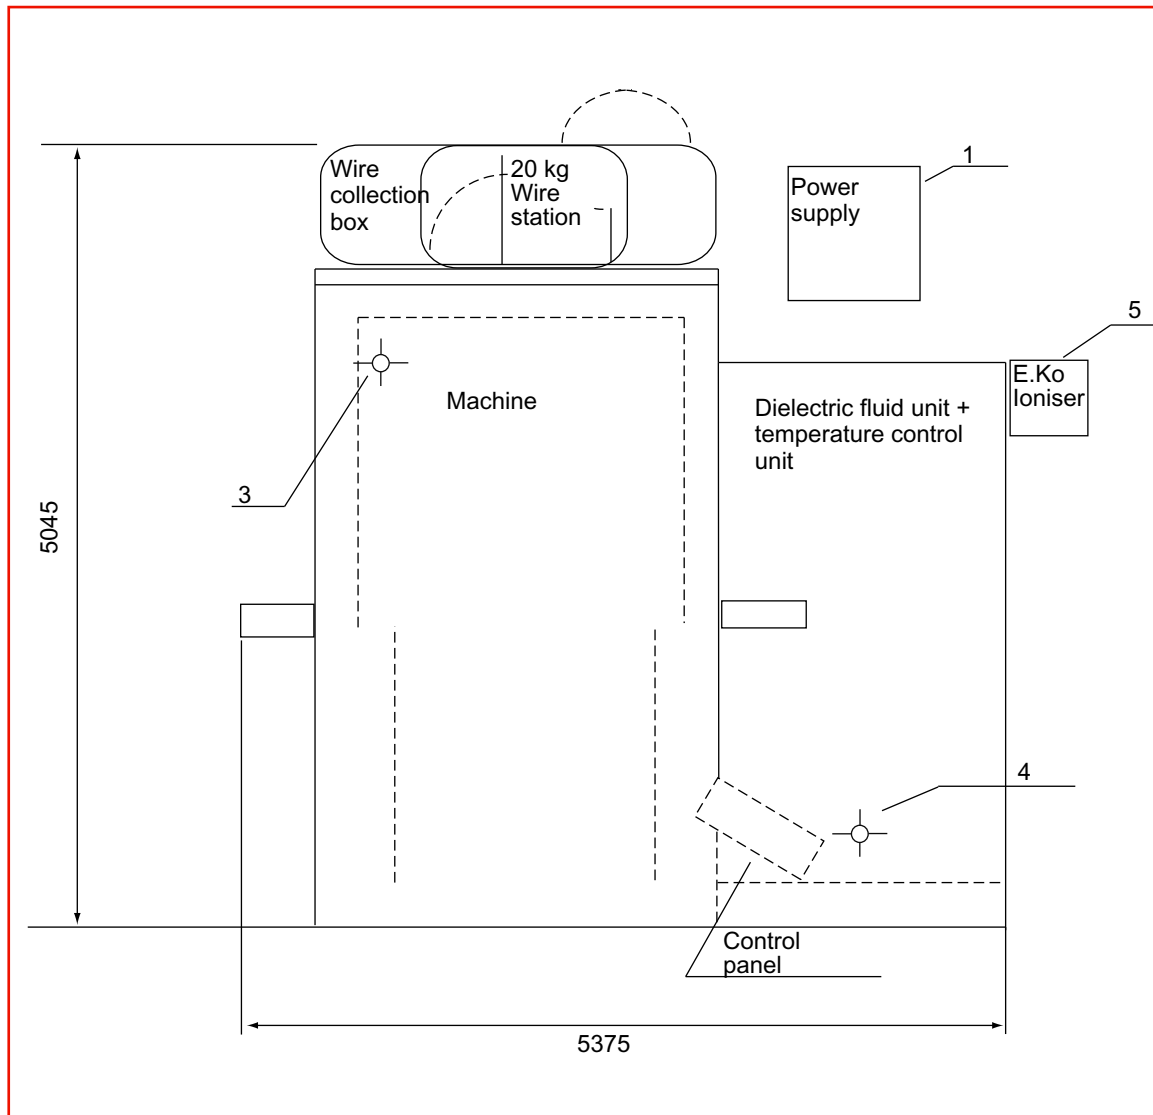

Additional information

Weight of machine body: 9000 kg
 Weight of tank without filling: 1000 kg
 Weight of power supply unit: 300 kg

Hight of machine: 2823 mm

Requested minimum measurement for entrance door/gate (WxH): 2900 x 2830 mm

- 1: Power supply
 3 phases 400 V / AC, PE
 ± 10%, 50/60 Hz, 30 kVA
 Primary fuse 50 A slow

A transformer with the following measures belongs to the machine:
 WxDxH (1,2 m x 0,4 m x 1,2 m)
 Weight: 300 kg

*The transformer is to be placed in a distance from max. 5 m to the machine. Here the max. cable length is to be considered to the cross section. The data are to be inferred from the documents of the transformer. (Cable not included in delivery volume)
 The transformer has to be connected to the electricity supply through a customer-sided provided electrician due to the different regulations for each region/country.*

- 2: Water supply:
 Single filling of the system with water, no regular water connection is necessary.
- 3: Pneumatic connection: 5-7 kgf/cm³ » 500-700 kpa
 Air volume minimum: 42 l/min
 (more than 75 l/min when AT system with wire diameter 0,1mm is used)
 3/8" hose connection
- 4: Network connection
- 5: E.KO-Ioniser dimension: WxDxH (370 x 660 x 1150 mm)
- 6: The erosion system should be set up to preferably consolidated concrete floors on a suitable hard industrial ground. To the capacity of MITSUBISHI possibly necessarily becoming shielding measures do not belong in accordance with EMV guideline.

FA-S Serie
 Modell/Model: FA50-S Advance
 (V-Package)

Aufstellplan
 Layout drawing

	Datum/ Date:	Name/ Name:
gezeichnet/drawn:	27.03.09	M. Torkel
geprüft/checked:	28.04.09	Y. Ucar
überarbeitet/revised:	03.06.09	M. Torkel

Blatt/Sheet: 1/1
 Techn. Änderungen vorbehalten
 Specifications subject to change
 without notice

